


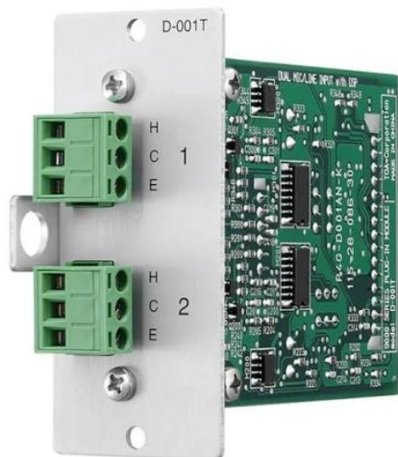

0.00 SAR ✓ In Stock

FEATURES :

Model: D-001T
Power Source: +24 V DC
Frequency: 20 Hz - 20 kHz
Dimensions: 35 (W) × 78
S/N Ratio: 70 dB

+966 530651576 | www.unityservicesksa.com

Specification

Power Source	+24 V DC, -24 V DC, +6 V DC
Current Consumption	20 mA (at +24 V DC), 20 mA (at -24 V DC), 75 mA (at +6 V DC)
Input	2 channels, 3 kΩ (when the phantom power is ON)/10 kΩ (when the phantom power is OFF), electronically-balanced, removable terminal block (3 pins)
Input Sensitivity	-60, -54, -48, -42, -36, -30, -24, -18, -10 dB* (selectable)
Frequency Response	20 Hz - 20 kHz, +1, -3 dB
S/N Ratio	70 dB or more (at A-weighted, Input short, Input sensitivity: -10 dB)
Cross Talk	Less than -75 dB (at 20 kHz, Input sensitivity: -10 dB)
Tone Control	Bass: ±12 dB (at 100 Hz) Treble: ±12 dB (at 10 kHz)
Compressor	Depth: 1 - 5
Phantom Power	+24 V DC
Operating Temperature	-10 °C to +40 °C
Dimensions	35 (W) × 78 (H) × 91.5 (D) mm
Weight	84 g