
TOA TZ-S60W Slim Array Speaker High Quality

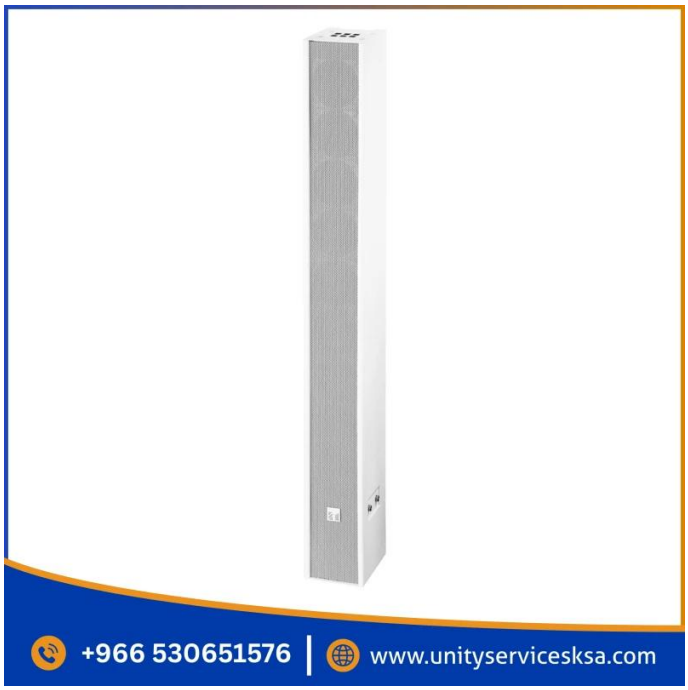

1,300.00 SAR ✓ In Stock

FEATURES :

TOA TZ-S60W Slim Array Speaker, equipped with 9 vertically arrayed 8cm speaker units, delivers high clarity sound with a 90° horizontal x 0° vertical directivity control. This feature enables it to project clear sound even in rooms with reverberation problem. Two TZ-S60W can be stacked to improve sound transmission distance and the vertical coverage area. For installation flexibility, both low impedance and high impedance is available by a rotary switch.

TOA TZ-S60W Slim Array Speaker High Quality

MAX. INPUT POWER (LOW IMPEDANCE)	120 W (Continuous pink noise)
RATED INPUT (HIGH IMPEDANCE)	60 W
RATED IMPEDANCE	Low Impedance: 8Ω 100 V line: 167 Ω (60 W), 330 Ω (30 W), 500 Ω (20 W), 1 kΩ (10 W): Selectable
SENSITIVITY	95 dB (1 W, 1 m)
FREQUENCY RESPONSE	180 Hz – 15,000 Hz
SPEAKER COMPONENT	8 cm (3″) cone-type × 9
OPERATING TEMPERATURE	-10 °C – +50 °C
FINISH	Enclosure: MDF, Wet Paint, White Punched Net: SECC, Wet Paint, White Wall Bracket: SECC, Wet Paint, White Side Panel: SECC, Wet Paint, White Metal Cover: SECC, Wet Paint, White
DIMENSIONS	100 (W) × 883 (H) × 130 (D) mm
WEIGHT	8.2 kg (unit only)
ACCESSORY	Speaker Bracket x 1, Joint Bracket x 1, Wall Bracket x 1, Fixing Bolt (M5 x 60) x 1, Hexagon Bolt (M6 x 12) (with plain washer and spring washer) x 2, Machine Screw (M5 x 15) (with plain washer and spring washer) x 4